

SPS 150 HC 200



DESCRIZIONE

Portata massima 150 kg.
Inclinazione manuale e foro passante con diam. 200 mm.
Rotazione con motore in corrente alternata, con inverter.



DESCRIPTION

Maximum load 150 kg.
Manual tilt and 200 mm diam. hollow center.
Slewing by AC motor with inverter.



DESCRIPTION

Portée max 150 kg.
Inclinaison manuelle
et trou centrale diam. 200 mm.
Rotation avec moteur à courante alternée
avec inverter.




BESCHREIBUNG

Maximale Tragfähigkeit 150 kg.
Manuelle Kippung und Hohlwelle
mit 200 mm Durchmesser.
Schwenken durch Wechselstrommotor
mit Wechselrichter.



DESCRIPCIÓN

Capacidad máxima 150 kg,
inclinación manual y agujero de paso
diám. 200 mm.
Rotación por motor de corriente alterna
con inverter.

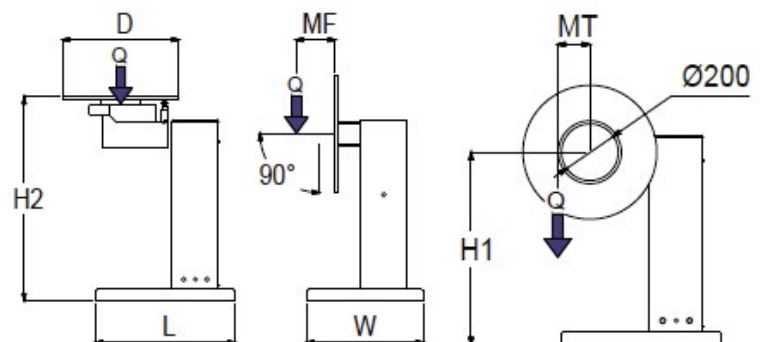

TIPO MOTORE	Q KG	MT DAMN	MF DAMN	D MM	H1 MM	H2 mm	L mm	W mm	rpm	Power supply - volt	kg
AC	150	10	10	550	730	910	700	700	0,9-9	1 PH - 230	150