




**In dotazione  
10 mt di cavo**


CP.0.DKL160

| CODICE      | PORTATA<br>(kg) | ALZATA<br>MASSIMA<br>M | VELOCITÀ DI<br>SOLLEVAMENTO<br>m/min | DIAMETRO<br>CAVO<br>mm | PESO<br>(kg) | POTENZA<br>(kw) |
|-------------|-----------------|------------------------|--------------------------------------|------------------------|--------------|-----------------|
| CP.0.DKL160 | 160             | 28                     | 23                                   | 30 x 5                 | 23           | 1.2             |
| CP.0.DKL230 | 230             | 28                     | 23                                   | 30 x 5                 | 24           | 1.3             |
| CP.0.DKL300 | 300             | 28                     | 15                                   | 30 x 6                 | 28           | 1.3             |
| CP.0.DKL500 | 500             | 18                     | 12                                   | 20 x 7                 | 29           | 2.0             |

## ACCESSORI VERRICELLO ELETTRICO (opzionali)

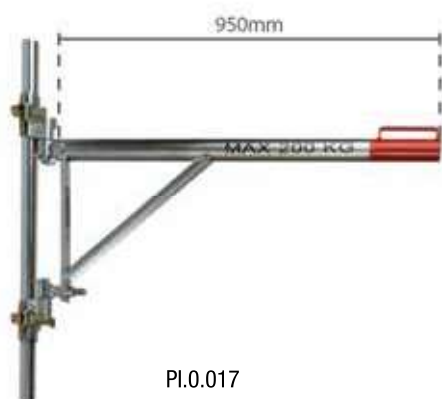

PI.0.017

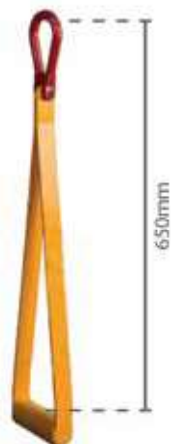


ST.0.011



CP.0.CEC


**Portata 200 kg**

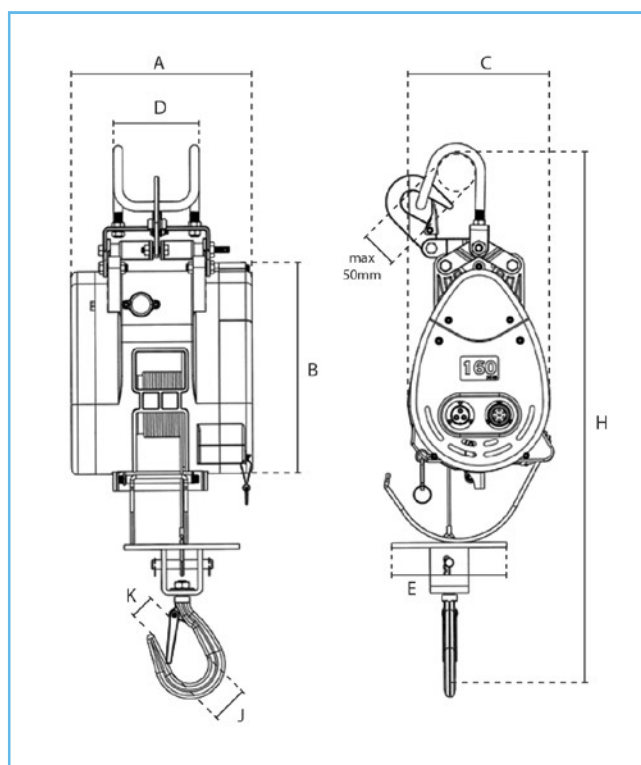

| CODICE      | A   | B   | C   | D   | E   | H   | J  | K  |
|-------------|-----|-----|-----|-----|-----|-----|----|----|
| CP.0.DKL160 | 240 | 263 | 180 | 114 | 129 | 660 | 49 | 41 |
| CP.0.DKL230 | 240 | 263 | 180 | 114 | 129 | 660 | 49 | 41 |
| CP.0.DKL300 | 210 | 308 | 240 | 146 | 155 | 670 | 49 | 41 |
| CP.0.DKL500 | 210 | 308 | 240 | 146 | 155 | 670 | 49 | 41 |




NVB35

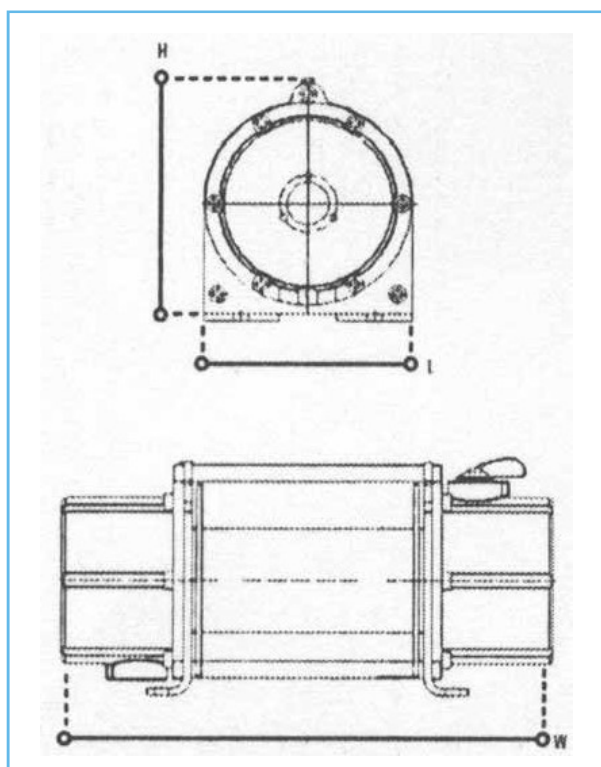


| CODICE | PORTATA<br>(kg) | Dimensione<br>cavo | Velocità<br>m/min | Durata<br>batteria min | W   | L   | H   | Peso<br>(kg) |
|--------|-----------------|--------------------|-------------------|------------------------|-----|-----|-----|--------------|
| NVB35  | 350             | 5 mm / 2 m         | 4                 | 15                     | 271 | 122 | 143 | 7,5          |



NVED200

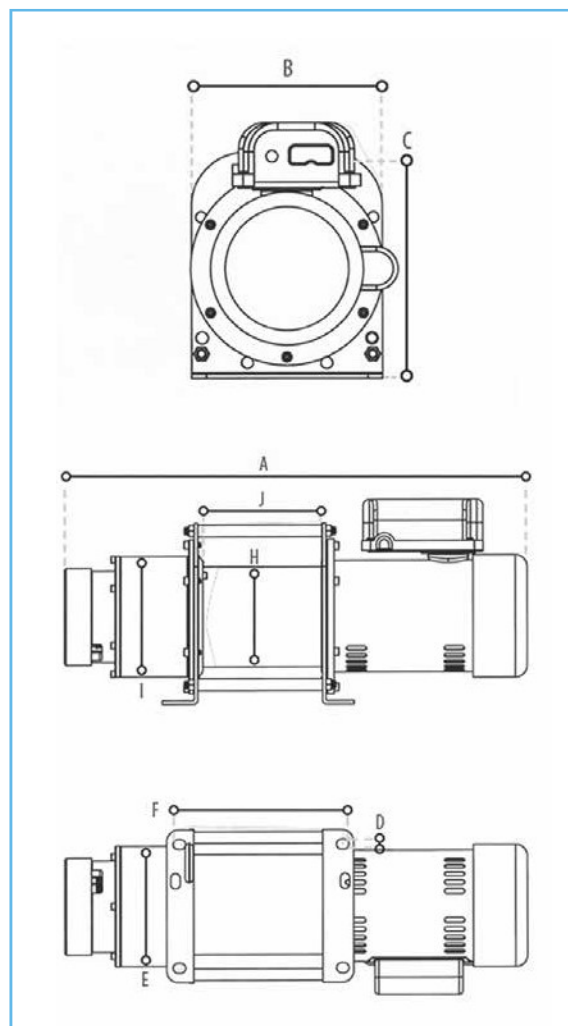


| CODICE  | PORTATA<br>(kg) | Velocità<br>m/min | DIMENSIONI (mm) |     |     |      |     |     |      |       |     | DIMENSIONE<br>CAVO | ASSORBIMENTO<br>IN PARTENZA<br>P/H | PESO<br>(kg) |
|---------|-----------------|-------------------|-----------------|-----|-----|------|-----|-----|------|-------|-----|--------------------|------------------------------------|--------------|
|         |                 |                   | A               | B   | C   | D    | E   | F   | H    | I     | J   |                    |                                    |              |
| NVED200 | 200             | 15                | 530             | 201 | 261 | Ø 13 | 155 | 160 | Ø 65 | Ø 155 | 116 | 6mm/30m            | 300                                | 34           |
| NVED250 | 250             | 15                | 530             | 201 | 261 | Ø 13 | 155 | 160 | Ø 65 | Ø 155 | 116 | 6mm/30m            | 300                                | 35           |
| NVED300 | 300             | 15                | 590             | 201 | 261 | Ø 13 | 224 | 160 | Ø 65 | Ø 155 | 151 | 7mm/30m            | 300                                | 38           |
| NVED500 | 500             | 21                | 710             | 285 | 310 | Ø 13 | 510 | 350 | Ø 80 | Ø 189 | 233 | 8mm/45m            | 300                                | 70           |

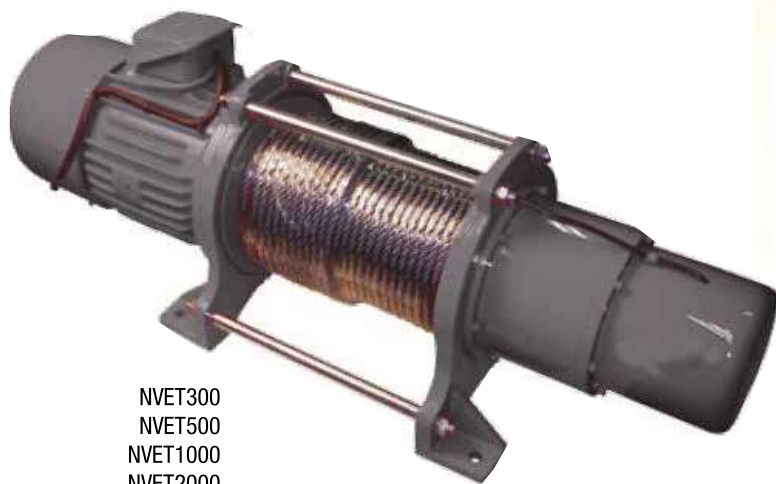

NVET300  
NVET500  
NVET1000  
NVET2000



NVET3000  
NVET5000

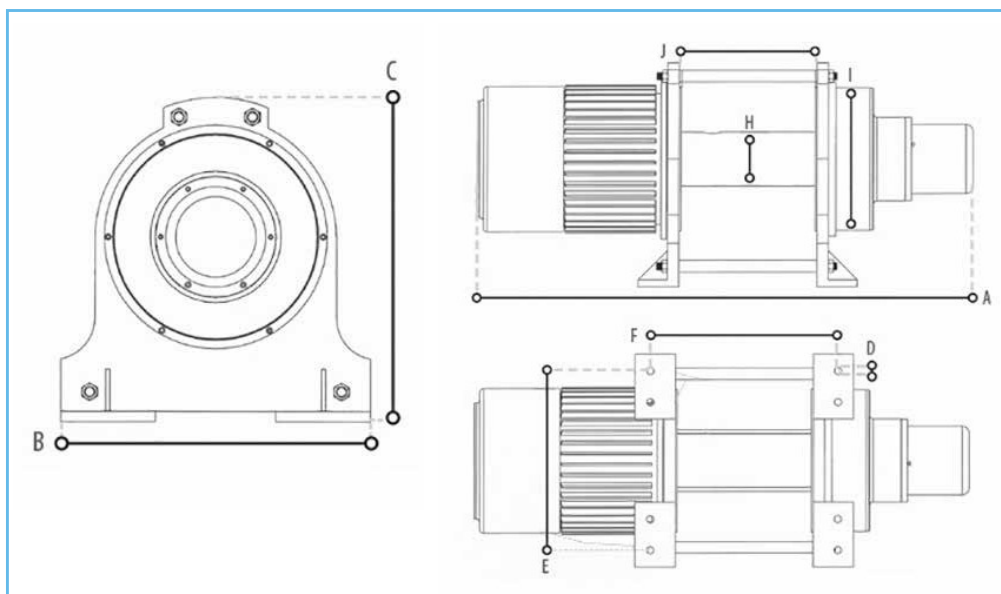


| CODICE          | PORTATA<br>(kg) | Velocità<br>m/min | Potenza<br>motore |       | DIMENSIONI (mm) |     |     |      |     |     |       |       |     | DIMENSIONE<br>CAVO | ASSORBIMENTO<br>IN PARTENZA<br>P/H | PESO<br>(kg) |
|-----------------|-----------------|-------------------|-------------------|-------|-----------------|-----|-----|------|-----|-----|-------|-------|-----|--------------------|------------------------------------|--------------|
|                 |                 |                   | Hp                | Kw    | A               | B   | C   | D    | E   | F   | H     | I     | J   |                    |                                    |              |
| <b>NVET300</b>  | <b>300</b>      | 15                | 1,5               | 1.119 | 710             | 310 | 285 | Ø 16 | 305 | 266 | Ø 65  | Ø 155 | 151 | 7mm/30m            | 300                                | 42           |
| <b>NVET500</b>  | <b>500</b>      | 21                | 1                 | 1.491 | 1110            | 350 | 365 | Ø 16 | 510 | 350 | Ø 80  | Ø 189 | 233 | 8mm/35m            | 300                                | 70           |
| <b>NVET1000</b> | <b>1000</b>     | 12                | 3x6               | 2.237 | 1110            | 350 | 365 | Ø 16 | 510 | 350 | Ø 140 | Ø 270 | 340 | 10mm/45m           | 300                                | 133          |
| <b>NVET2000</b> | <b>2000</b>     | 12                | 5x6               | 3.729 | 1290            | 590 | 520 | Ø 25 | 540 | 480 | Ø 140 | Ø 390 | 375 | 12mm/70m           | 300                                | 364          |
| <b>NVET3000</b> | <b>3000</b>     | 12                | 7.5x6             | 5.593 | 1350            | 590 | 520 | Ø 25 | 540 | 480 | Ø 140 | Ø 390 | 375 | 16mm/70m           | 300                                | 375          |
| <b>NVET5000</b> | <b>5000</b>     | 12                | 10x6              | 7.457 | 1450            | 590 | 520 | Ø 25 | 540 | 480 | Ø 140 | Ø 390 | 375 | 20mm/80m           | 300                                | 395          |

# VERRICELLO ELETTRICO MONOFASE PER CORDE IN POLIESTERE



DI.O.MRV

| CODICE   | PORTATA<br>(kg) | VELOCITÀ<br>MASSIMA<br>M/MIN | PESO<br>(kg) | POTENZA<br>(kw) |
|----------|-----------------|------------------------------|--------------|-----------------|
| DI.O.MRV | 750             | 15                           | 40           | 2.2             |

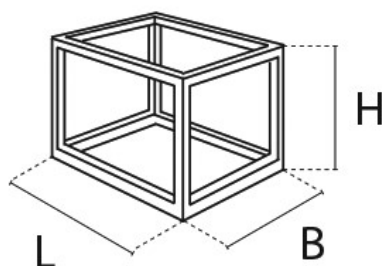

| PORTATA<br>(kg) | Larghezza<br>mm | PROFONDITÀ<br>mm | ALTEZZA<br>mm |
|-----------------|-----------------|------------------|---------------|
| 750             | 600             | 500              | 320           |